







TECHNICAL SPECIFICATION

- 25-year design life.
- Fitted with environmental telemetry and flowmeter.
- Fitted with twin surge protection tanks.
- Risers and flowlines rated for 60,000 BPH loading rates.
- · Diverless riser connection.
- Designed to preload 90m section of chain.
- A dual path (20") product swivel.
- Central (3") path for electric power and signals.
- A hydraulic winch for installation and maintenance purposes.
- · Automatic grease system for main and swivel bearings.
- Double mooring hawser assembly with universal joint.
- hawser load monitoring system (hawsers not supplied).
- External frames to facilitate anchor chain installation with minimum use of divers.
- Original spares pack as supplied by the manufacturer (Bluewater) is included.
- · Life-saving and navigation equipment.


OVERALL DIMENSIONS & WEIGHT

Buoy hull diameter: 18.0m
Buoy hull diameter (incl. skirt): 21.9m
Buoy hull height: 6.81m

Total buoy height (incl. antennas etc.): 18.2m (bottom turret spider to top)

Weight: 684 tonnes

Draft (free floating): 5.25m (measured from spider bottom plate)
Draft (installed): 6.73m (measured from spider bottom plate)

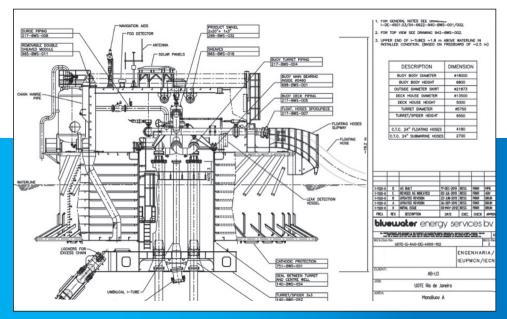









St Michaels House 40 Sawmills Road, Diss, IP22 4DA UNITED KINGDOM

Contact us:

Tel: +44 (0)1379 640021 E-mail: marine@safests.com

www.safests.com

